

Tilburg University

The algebraic Riccati equation and singular optimal control

Geerts, A.H.W.

Publication date:
1993

Document Version
Publisher's PDF, also known as Version of record

[Link to publication in Tilburg University Research Portal](#)

Citation for published version (APA):
Geerts, A. H. W. (1993). *The algebraic Riccati equation and singular optimal control: The discrete-time case*. (Research Memorandum FEW). Faculteit der Economische Wetenschappen.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

CBM
R

7626
1993
613

UNIVERSITY
HOLHEKE
UNIVERSITEIT
BRABANT

POSTBOX 90153
5000 LE TILBURG
THE NETHERLANDS



A45
Optimal Control


DEPARTMENT OF ECONOMICS
RESEARCH MEMORANDUM

THE ALGEBRAIC RICCATI EQUATION AND
SINGULAR OPTIMAL CONTROL:
THE DISCRETE-TIME CASE

Ton Geerts

FEW 613

Communicated by Prof.dr. J.M. Schumacher

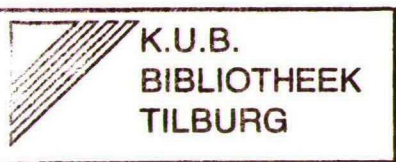

K.U.B.
BIBLIOTHEEK
TILBURG

THE ALGEBRAIC RICCATI EQUATION AND SINGULAR OPTIMAL CONTROL: THE DISCRETE-TIME CASE*

Ton Geerts¹

Tilburg University, Department of Economics,
P.O. Box 90153, NL-5000 LE Tilburg, The Netherlands,
fax: (0)13-663280, e-mail: geerts@kub.nl

Abstract We consider a *general* infinite-horizon linear-quadratic control problem, with *arbitrary* stability constraints, subject to a standard *discrete-time* system. In particular, we derive *necessary and sufficient* conditions for the *existence of the optimal cost*, and we characterize this optimal cost as a certain solution of the associated *linear matrix inequality*. This solution turns out to satisfy the corresponding (possibly *singular*) *algebraic Riccati equation*, and thus we can establish a *map* from all possible stability constraints to the set of positive semidefinite solutions of this equation. As a by-result, we present a *necessary and sufficient* condition for the *existence of a positive semidefinite* solution of the *general Riccati equation*. Finally, we derive *necessary and sufficient* conditions for the *existence of optimal controls* if the underlying discrete-time system is *left invertible*, and these optimal controls turn out to be implementable by a *unique feedback law*.

Keywords Infinite-horizon linear-quadratic control, discrete-time system, arbitrary stability constraints, regularity and singularity, linear matrix inequality, algebraic Riccati equation, left invertibility, feedback law.

1. Introduction and preliminaries.

Consider the standard discrete-time system Σ

$$x(i+1) = Ax(i) + Bu(i), y(i) = Cx(i) + Du(i), \quad (1)$$

together with the additional output variable

$$z(i) = Sx(i) + Tu(i), \quad (2)$$

where, for all $i \geq 0$, $u(i) \in \mathbb{R}^m$, $x(i) \in \mathbb{R}^n$ and $x(0) = x_0$, $y(i) \in \mathbb{R}^r$ and $z(i) \in \mathbb{R}^s$. All matrices involved are real and constant. Also, for every x_0 and every control sequence $u = \{u(i)\}_{i=0}^\infty$, we define the function

$$J(x_0, u) := \sum_{i=0}^\infty y'(i)y(i). \quad (3)$$

Then we are interested in the *Linear-Quadratic Control Problem with z-stability (LQCP)_z*: For all x_0 , determine

$$J_z(x_0) := \inf \{J(x_0, u) \mid u \text{ is such that } \lim_{i \rightarrow \infty} z(i) = 0\}, \quad (4)$$

and if, for every x_0 , $J_z(x_0) < \infty$, then compute (if possible) for every x_0 a control sequence \bar{u} such that $J_z(x_0) = J(x_0, \bar{u})$ and $\lim_{i \rightarrow \infty} z(i) = 0$. The problem is called *regular* if $\ker(D) = 0$ and *singular* if $\ker(D) \neq 0$. If $\ker(S) = 0$ and $T = 0$, then $(\text{LQCP})_z$ will be called the *LQCP with (state) stability*, and if $s = 0$, then we will speak of the *LQCP without stability*. Regular as well as singular cases for these two problems are discussed in the lengthy [1], by means of Silverman's structure algorithm. In the present paper, we will treat $(\text{LQCP})_z$ with S and T *arbitrary, regardless* whether D is left invertible or not, by a more direct algebraic approach. In Section 2 we will derive *necessary and sufficient* conditions for *existence of the optimal cost* (1.4). Finally, in Section 3 we will present *necessary and sufficient* conditions for *existence of optimal controls* if the underlying system Σ is *left invertible* [1, p. 351], i.e., if $\rho := \text{normal rank}(T(z)) = m$, with $T(z) := D + C(zI - A)^{-1}B$ [1, p. 350].

We will need a few well-known observations, as well as some new statements. Assume that there exists a matrix $M_z \geq 0$ such that, for all $x_0 \in \mathbb{R}^n$, $J_z(x_0) \leq x_0' M_z x_0$. Then there *exists* a unique $K_z \in \mathbb{R}^{n \times n}$, $K_z \geq 0$, such that, for all x_0 , $J_z(x_0) = x_0' K_z x_0$ [2, Lemma 5]. Next, let

*: Part of this research was carried out in the course of 1991, when the author was with the Mathematical Institute of Würzburg University, Germany, as an Alexander von Humboldt-research fellow.

1: Supported by the Dutch Organization for scientific research (N.W.O.).

$i \geq 1$, and assume that $u(j)$ ($j = 0, 1, \dots, (i-1)$) are given. Then the function $J_z : \mathbf{R}^n \rightarrow \mathbf{R}^+$ satisfies the *Dissipation Inequality* (e.g. [2, Lemma 1])

$$x'_0 K_z x_0 \leq \sum_{j=0}^{i-1} y'(j)y(j) + x'(i)K_z x(i), \quad (5)$$

$$\text{and } x'_0 K_z x_0 = \inf \{ \sum_{j=0}^{i-1} y'(j)y(j) + x'(i)K_z x(i) | u(j), j = 0, \dots, (i-1) \} \quad (6)$$

$$\text{If, moreover, } P(K) := \begin{bmatrix} C'C + A'KA - K & C'D + A'KB \\ D'C + B'KA & D'D + B'KB \end{bmatrix}, \text{ with } K = K' \in \mathbf{R}^{n \times n}, \quad (7)$$

$$\text{then } \sum_{j=0}^{i-1} y'(j)y(j) + x'(i)K x(i) - x'_0 K x_0 = \sum_{j=0}^{i-1} [x'(j) u'(j)] P(K) \begin{bmatrix} x(j) \\ u(j) \end{bmatrix}. \quad (8)$$

(Sketchy proof for (1.8): Take $i = 1$. Then (1.8) is clear from (1.1) and (1.7). Next, take $i = 2$. Then the left hand-side of (1.8) is equal to $\{y'(1)y(1) + x'(2)K x(2) - x'(1)K x(1)\} + \{y'(0)y(0) + x'(1)K x(1) - x'_0 K x_0\} = [x'(1) u'(1)] P(K) \begin{bmatrix} x(1) \\ u(1) \end{bmatrix} + [x'(0) u'(0)] P(K) \begin{bmatrix} x(0) \\ u(0) \end{bmatrix}$, etc.) Combination of (1.5) with (1.8) now yields that the right hand-side of (1.8) for $K = K_z$ is positive semidefinite, and thus, by taking $i = 1$ and realizing that x_0 as well as $u(0)$ are arbitrary, we find that

$$P(K_z) \geq 0, \quad (9)$$

and hence $K_z \in \Gamma := \{K \in \mathbf{R}^{n \times n} | K = K', P(K) \geq 0\}$,
the solution set of the *Linear Matrix Inequality* (LMI). If, in addition,

$$\phi(K) := C'C + A'KA - K - (C'D + A'KB)(D'D + B'KB)^+(D'C + B'KA) \quad (11)$$

(where N^+ denotes the Moore-Penrose inverse of the matrix N), and

$$F(K) := -(D'D + B'KB)^+(D'C + B'KA) (K = K' \in \mathbf{R}^{n \times n}), \quad (12)$$

then $K \in \Gamma \Leftrightarrow \phi(K) \geq 0, D'D + B'KB \geq 0, -(D'D + B'KB)F(K) = D'C + B'KA$ (Schur's Lemma), and $\text{rank}(P(K)) = \text{rank}(\phi(K)) + \text{rank}(D'D + B'KB)$. Hence, for every $\bar{x} \in \mathbf{R}^n, \bar{u} \in \mathbf{R}^m$ and every $K \in \Gamma$,

$$[\bar{x}' \bar{u}'] P(K) \begin{bmatrix} \bar{x} \\ \bar{u} \end{bmatrix} = \bar{x}' \phi(K) \bar{x} + [\bar{u}' - \bar{x}' F(K)] [D'D + B'KB] [\bar{u} - F(K) \bar{x}] \quad (13)$$

and thus, for every x_0 and every $i \geq 1$, (1.6) transforms by (1.8) into

$$\inf \{ \sum_{j=0}^{i-1} [x'(j) \phi(K_z) x(j) + [u'(j) - x'(j) F'(K_z)] [D'D + B'K_z B] [u(j) - F(K_z) x(j)]] | u(j), j = 0, \dots, (i-1) \} = 0. \quad (14)$$

We establish that Γ contains the matrix that represents J_z , the optimal cost for (LQCP) $_z$, provided that J_z is bounded from above by a quadratic form. Furthermore

Proposition 1.1.

$$\phi(K_z) = 0, \text{ rank}(P(K_z)) = \text{rank}(D'D + B'K_z B).$$

Proof. Take $i = 1$ in (1.14). Then the infimum is attained for $u(0) = F(K_z)x_0$. It follows that $x'_0 \phi(K_z)x_0 = 0$ for every x_0 .

Lemma 1.2.

Assume that $K \in \Gamma$. Then $\text{rank}(P(K)) \geq \rho$. If $P(K) = \begin{bmatrix} C'_K \\ D'_K \end{bmatrix} [C_K \ D_K]$, with $[C_K \ D_K]$ right invertible and $T_K(z) := D_K + C_K(zI - A)^{-1}B$, then $\text{rank}(P(K)) = \rho$ if and only if $T_K(z)$ is right invertible as a rational matrix.

Proof. Follows directly by appropriately rewriting some proofs in [3].

Corollary 1.3.

Let $K \in \Gamma$ and $\phi(K) = 0$. Then $\text{rank}(P(K)) = \text{rank}(D'D + B'KB) = \rho$.

Proof. It is clear that $C'_K(I - D_K(D'_K D_K)^+ D'_K)C_K = \phi(K)$ in Lemma 1.2 and since $\phi(K) = 0$, it follows that D_K is right invertible. Hence, by Lemma 1.2, $\text{rank}(D'D + B'KB) = \text{rank}$

$(P(K)) = \rho$.

Corollary 1.4.

If $\rho = m$, then $D'D + B'K_z B > 0$.

Proposition 1.5.

Let $x_0 \in \mathbb{R}^n$, $u = \{u(i)\}_{i=1}^\infty$ be such that $z(i) \rightarrow 0 (i \rightarrow \infty)$, and set $v(i) := u(i) - F(K_z)x(i)$, $i \geq 0$. Then $\sum_{i=0}^\infty v'(i)[D'D + B'K_z B]v(i) < \infty \Leftrightarrow J(x_0, u) < \infty$. In addition, if $J(x_0, u) < \infty$, then

$$J(x_0, u) = \sum_{i=0}^\infty v'(i)[D'D + B'K_z B]v(i) + x'_0 K_z x_0. \quad (15)$$

Proof. If $J(x_0, u) < \infty$, then $x'(i)K_z x(i) \leq \sum_{j=i}^\infty y'(j)y(j)$, by definition and time-invariancy (!)

and hence $x'(i)K_z x(i) \rightarrow 0 (i \rightarrow \infty)$. Thus, by (1.8), (1.13) and Proposition 1.1, we get (1.15). Conversely, if $\sum_{i=0}^\infty v'(i)[D'D + B'K_z B]v(i) < \infty$, then, again by (1.8), (1.13) and Proposition 1.1, $J(x_0, u)$ cannot be infinite, as $x'(i)K_z x(i) \geq 0$ for all i . Thus, $J(x_0, u) < \infty$ and hence, as $z(i) \rightarrow 0$, $x'(i)K_z x(i) \rightarrow 0 (i \rightarrow \infty)$, and we have (1.15).

Corollary 1.6.

Assume in Proposition 1.5 that $\rho = m$. Then $J(x_0, u) = x'_0 K_z x_0 \Leftrightarrow u(i) = F(K_z)x(i)$ for every $i \geq 0$.

Proof. By Corollary 1.4, $D'D + B'K_z B > 0$. Now apply Proposition 1.5.

It follows from Corollary 1.6 that if for every x_0 an *optimal* control sequence for (LQCP)_z exists, then this sequence can be given in terms of a feedback law, and this feedback law is *unique*, if $\rho = m$. For more details, see Section 3.

We will close this preliminary Section with the following, partly new, algebraic results. Let $\Gamma_0 \subset \Gamma$ denote the set of solutions of the algebraic Riccati equation (ARE):

$$\Gamma_0 := \{K \in \Gamma | \phi(K) = 0\}. \quad (16)$$

Let, further, for any $G \in \mathbb{R}^{m \times n}$ and any $K = K' \in \mathbb{R}^{n \times n}$,

$$A_G := A + BG, C_G := C + DG, S_G := S + TG, \quad (17)$$

$$\phi_G(K) := C'_G C_G + A'_G K A_G - K - (A'_G K B + C'_G D)(D'D + B'K B)^{-1}(B'K A_G + D'C_G). \quad (18)$$

Proposition 1.7.

(a) If $K \geq 0$, then $\phi(K) \geq 0 \Leftrightarrow \phi_G(K) \geq 0$ and $\phi(K) = 0 \Leftrightarrow \phi_G(K) = 0$.

(b) If $K \in \Gamma_0$, then $K = A'_{F(K)} K A_{F(K)} + C'_{F(K)} C_{F(K)}$.

(c) If $D'D + B'K B$ is invertible, then $A_{F(K)} = A_G - B(D'D + B'K B)^{-1}(D'C_G + B'K A_G)$.

If, moreover, $0 \leq K \in \Gamma_0$, then $D'C_{F(K)} + B'K A_{F(K)} = 0$.

Proof. If $K \in \Gamma$ and $K \geq 0$, then $P(K) \geq 0 \Leftrightarrow \phi(K) \geq 0$ and $\phi(K) = 0 \Leftrightarrow \text{rank}(P(K)) = \text{rank}(D'D + B'K B)$. If $P_G(K)$ stands for (1.7) with A_G and C_G instead of A and C , then, obviously, $P_G(K) \geq 0 \Leftrightarrow P(K) \geq 0$, and thus we establish (a). For (b), see [1, (14)]. Next, if $D'D + B'K B$ is invertible, then $(D'D + B'K B)^{-1}(D'C_G + B'K A_G) + F(K) = G$. Finally, by (a), $\phi(K) = 0 \Leftrightarrow \phi_{F(K)}(K) = 0$, and the proof of (c) is then completed by applying (b).

2. Necessary and sufficient conditions for the existence of the optimal cost.

In the sequel, $\langle A | \text{im}(B) \rangle = \text{im}(B) + A \text{im}(B) + \dots + A^{n-1} \text{im}(B)$, $\langle \ker(C) | A \rangle = \ker(C) \cap \ker(CA) \cap \dots \cap \ker(CA^{n-1})$, $\mathcal{X}_s(A)$ denotes the *stable* subspace of A [6, Ch. VI]

and $\begin{bmatrix} zI - A & -B \\ C & D \end{bmatrix}$ is the *system matrix* of Σ . If $A(\mathcal{L}_1) \subset \mathcal{L}_1$, $A(\mathcal{L}_2) \subset \mathcal{L}_2$ and $\mathcal{L}_1 \subset \mathcal{L}_2$, then

$\sigma(A | \mathcal{L}_2 / \mathcal{L}_1)$ denotes the spectrum of the quotient map induced by A on $\mathcal{L}_2 / \mathcal{L}_1$, the quotient space of \mathcal{L}_2 over \mathcal{L}_1 (for maps and matrices we use the same symbols).

Definition 2.1 [1, Section III].

Let $\mathcal{V} = \mathcal{V}(\Sigma)$ denotes the space of points $x_0 \in \mathbb{R}^n$ for which there exist $u(i)$ ($i \geq 0$) such that, for all $i \geq 0$, $y(i) = 0$. Let, moreover, $\mathcal{V}_z = \mathcal{V}_z(\Sigma)$ denote the space of points $x_0 \in \mathbb{R}^n$ for which there exist $u(i)$ ($i \geq 0$) such that, for all $i \geq 0$, $y(i) = 0$ and $z(i) = 0$.

Proposition 2.2.

\mathcal{V} is the largest subspace \mathcal{L} for which there exists a map $G : \mathbb{R}^n \rightarrow \mathbb{R}^m$ such that $(A + BG)\mathcal{L} \subset \mathcal{L}$, $(C + DG)\mathcal{L} = 0$. If $G \in \mathcal{G}(\Sigma) := \{H : \mathbb{R}^n \rightarrow \mathbb{R}^m | (A_H)\mathcal{V} \subset \mathcal{V}, (C_H)\mathcal{V} = 0\}$, then $\mathcal{V} = \langle \mathcal{L}, (C + DG)\mathcal{L} = 0 \rangle$.

$\ker (C + DG)|A + BG > \mathcal{V}_z$ is the largest subspace \mathcal{L} for which there exists a map $G : \mathbf{R}^n \rightarrow \mathbf{R}^m$ such that $(A + BG)\mathcal{L} \subset \mathcal{L}, (C + DG)\mathcal{L} = 0, (S + TG)\mathcal{L} = 0$. If $G \in \mathcal{G}_z(\Sigma) := \{H : \mathbf{R}^n \rightarrow \mathbf{R}^m | (A_H)\mathcal{V}_z \subset \mathcal{V}_z, (C_H)\mathcal{V}_z = 0, (S_G)\mathcal{V}_z = 0\}$, then $\mathcal{V}_z = \ker \begin{bmatrix} C & + & DG \\ S & + & TG \end{bmatrix} | A + BG >$.

Furthermore, $\mathcal{G}_z(\Sigma) \cap \mathcal{G}(\Sigma) \neq \emptyset$.

Proof. All claims, except for the last one, are in [1, Section III]. Next, let $G \in \mathcal{G}_z(\Sigma) \neq \emptyset$. Then the map $G|_{\mathcal{V}_z}$ can be extended on \mathcal{V} in such a way that the resulting extension, $\tilde{G} : \mathcal{V} \rightarrow \mathbf{R}^m$, is such that $(A + B\tilde{G})\mathcal{V} \subset \mathcal{V}, (C + D\tilde{G})\mathcal{V} = 0$ (e.g. [4]). If \tilde{G} is an arbitrary extension of G on \mathbf{R}^n , then $\tilde{G} \in \mathcal{G}_z(\Sigma) \cap \mathcal{G}(\Sigma)$.

Now let $G \in \mathcal{G}_z(\Sigma) \cap \mathcal{G}(\Sigma)$, then, with $v(i) = u(i) - Gx(i)$, (1.1)-(1.2) transform into

$$x(i+1) = A_G x(i) + Bv(i), y(i) = C_G x(i) + Dv(i), \quad (1)$$

$$z(i) = S_G x(i) + Tv(i). \quad (2)$$

Suppose that \mathcal{X}_2 is such that $\mathcal{V}_z \oplus \mathcal{X}_2 = \mathcal{V}$, and that \mathcal{X}_3 is such that $\mathcal{V} \oplus \mathcal{X}_3 = \mathbf{R}^n$. Moreover, let

$$[\ker \begin{pmatrix} D \\ T \end{pmatrix}] \cap B^{-1}(\mathcal{V}_z) \oplus \mathcal{U}_2 = [\ker (D) \cap B^{-1}(\mathcal{V})], \text{ and let } [\ker (D) \cap B^{-1}(\mathcal{V})] \oplus \mathcal{U}_3 = \mathbf{R}^m.$$

Then, with respect to suitably chosen bases, (2.1) - (2.2) transform into

$$\begin{bmatrix} x_1(i+1) \\ x_2(i+1) \\ x_3(i+1) \end{bmatrix} = \begin{bmatrix} \bar{A}_{11} & \bar{A}_{12} & \bar{A}_{13} \\ 0 & \bar{A}_{22} & \bar{A}_{23} \\ 0 & 0 & \bar{A}_{33} \end{bmatrix} \begin{bmatrix} x_1(i) \\ x_2(i) \\ x_3(i) \end{bmatrix} + \begin{bmatrix} B_{11} & B_{12} & B_{13} \\ 0 & B_{22} & B_{23} \\ 0 & 0 & B_{33} \end{bmatrix} \begin{bmatrix} v_1(i) \\ v_2(i) \\ v_3(i) \end{bmatrix}, \quad (3a)$$

$$y(i) = [0 \ 0 \ \bar{C}_3] \begin{bmatrix} x_1(i) \\ x_2(i) \\ x_3(i) \end{bmatrix} + [0 \ 0 \ D_3] \begin{bmatrix} v_1(i) \\ v_2(i) \\ v_3(i) \end{bmatrix}, \quad (3b)$$

$$z(i) = [0 \ \bar{S}_2 \ \bar{S}_3] \begin{bmatrix} x_1(i) \\ x_2(i) \\ x_3(i) \end{bmatrix} + [0 \ T_2 \ T_3] \begin{bmatrix} v_1(i) \\ v_2(i) \\ v_3(i) \end{bmatrix}, \quad (4)$$

with $\ker (B_{33}) \cap \ker (D_3) = 0$ and $\ker \begin{pmatrix} B_{22} & B_{23} \\ 0 & B_{33} \end{pmatrix} \cap \ker \begin{pmatrix} 0 & D_3 \\ T_2 & T_3 \end{pmatrix} = 0$, by construction.

Note that $y(i)$ is generated by the subsystem for $x_3(i)$, whereas $y(i)$ and $z(i)$ jointly are generated by the subsystem for $x_2(i)$ and $x_3(i)$. These subsystems are *strongly observable* [1, p. 344] by construction, i.e., the associated system matrices are of full column rank for every $s \in \mathbb{C}$ [1, Section III], [5]. Thus, these subsystems are *strongly detectable* [1, p. 354], i.e., if $y(i) \rightarrow 0$,

then $x_3(i) \rightarrow 0$, and if $\begin{bmatrix} y(i) \\ z(i) \end{bmatrix} \rightarrow \begin{bmatrix} 0 \\ 0 \end{bmatrix}$, then $\begin{bmatrix} x_2(i) \\ x_3(i) \end{bmatrix} \rightarrow \begin{bmatrix} 0 \\ 0 \end{bmatrix}$ ($i \rightarrow \infty$), irrespective of inputs and initial states [1, Section III], [5]. This key observation leads us to the first main result.

Theorem 2.3

$$\forall x_0 \in \mathbf{R}^n : J_z(x_0) < \infty \Leftrightarrow \mathcal{X}_s(A) + \langle A | \text{im}(B) \rangle + \mathcal{V}_z = \mathbf{R}^n. \quad (5)$$

Assume this to be the case. Then there exists a unique matrix $K_z \in \Gamma_0$ such that, for all

$x_0, J_z(x_0) = x_0' K_z x_0$ and $K_z \mathcal{V}_z = 0$. In addition, if $K \in \Gamma, K \mathcal{V}_z = 0$, then $K \leq K_z$.

Proof. Let $x_0 \in \mathbf{R}^n, J(x_0, u) < \infty$ and $z(i) \rightarrow 0$ ($i \rightarrow \infty$) for some u . Then, also, $y(i) \rightarrow 0$ ($i \rightarrow \infty$). Now, consider (2.3)-(2.4). From the foregoing, then, $\begin{bmatrix} x_2(i) \\ x_3(i) \end{bmatrix} \rightarrow \begin{bmatrix} 0 \\ 0 \end{bmatrix}$ ($i \rightarrow \infty$), i.e., the

Euclidean distance between $x(i)$ and \mathcal{V}_z converges to zero as i tends to infinity. As, for every $x_0 \in \mathcal{V}_z, J_z(x_0) = 0$, we establish that $J_z(x_0) < \infty$ for every $x_0 \in \mathbf{R}^n$ only if

$$\left(\begin{bmatrix} \bar{A}_{22} & \bar{A}_{23} \\ 0 & \bar{A}_{33} \end{bmatrix}, \begin{bmatrix} B_{22} & B_{23} \\ 0 & B_{33} \end{bmatrix} \right) \text{ is stabilizable} \quad (6)$$

[6, Ch. VI]. Assume this to be the case. Then there *exists* a feedback $\begin{bmatrix} v_2(i) \\ v_3(i) \end{bmatrix} =$

$\begin{bmatrix} H_{22} & H_{23} \\ H_{32} & H_{33} \end{bmatrix} \begin{bmatrix} x_2(i) \\ x_3(i) \end{bmatrix}$ such that the resulting closed-loop matrix for $x_2(i)$ and $x_3(i)$ has all its eigenvalues *within the unit circle* [6, Ch. VI]. Therefore there *exists* a matrix $M_z \geq 0$, with $\mathcal{V}_z \subset \ker(M_z)$, such that, for all x_0 , $J_z(x_0) \leq x_0' M_z x_0$, and hence there also *exists* a unique $K_z \geq 0$ such that, for all x_0 , $J_z(x_0) = x_0' K_z x_0$ [2, Lemma 5], and $K_z \mathcal{V}_z = 0$. From Proposition 1.1, then, $K_z \in \Gamma_0$. On the other hand, if \mathcal{V}_z denotes a basis matrix for \mathcal{V}_z , then, obviously, by the Hautus test, $(2.6) \Leftrightarrow (A_G, [B \ \mathcal{V}_z])$ is stabilizable $\Leftrightarrow \mathcal{X}_s(A) + \langle A | \text{im}([B \ \mathcal{V}_z]) \rangle = \mathbf{R}^n$ [6, Ch. VI] $\Leftrightarrow \mathcal{X}_s(A) + \langle A | \text{im}(B) \rangle + \mathcal{V}_z = \mathbf{R}^n$, since, $\langle A | \text{im}([B \ \mathcal{V}_z]) \rangle = \langle A | \text{im}(B) \rangle + \mathcal{V}_z + A(\mathcal{V}_z) + \dots + A^{n-1}(\mathcal{V}_z) = \langle A | \text{im}(B) \rangle + \mathcal{V}_z$, as $(A + BG)\mathcal{V}_z \subset \mathcal{V}_z$. Finally, assume that (2.5) holds and let $K \in \Gamma$, $K\mathcal{V}_z = 0$. If $J(x_0, u) < \infty$ and $z(i) \rightarrow 0 (i \rightarrow \infty)$, then $x_2(i) \rightarrow 0$ and $x_3(i) \rightarrow 0 (i \rightarrow \infty)$ in (2.3)-(2.4), and hence $x'(i)Kx(i) \rightarrow 0 (i \rightarrow \infty)$. Thus, from (1.8), $x_0' K_z x_0 = J_z(x_0) \leq x_0' K x_0$ and $K_z \geq K$. This completes the proof.

Definition 2.4.

Σ is *output stabilizable* if $\mathcal{X}_s(A) + \langle A | \text{im}(B) \rangle + \mathcal{V} = \mathbf{R}^n$.

Corollary 2.5.

Let J_+, J_- denote the optimal costs for the LQCP with and without stability, respectively. For every $x_0 \in \mathbf{R}^n$, $J_+(x_0) < \infty$ if and only if Σ is stabilizable. If this is the case, for all x_0 , $J_+(x_0) = x_0' K_+ x_0$ with $K_+ \in \Gamma_0$ and, if $K \in \Gamma$, then $K \leq K_+$. For every $x_0 \in \mathbf{R}^n$, $J_-(x_0) < \infty$ if and only if Σ is output stabilizable. If this is the case, then, for all x_0 , $J_-(x_0) = x_0' K_- x_0$ with $K_- \in \Gamma_0$, $\ker(K_-) = \mathcal{V}$, and, if $K \in \Gamma$ and $K\mathcal{V} = 0$, then $K \leq K_-$. Moreover, $u(i) = F(K_-)x(i) (i \geq 0)$ is optimal.

Proof. If $\ker(S) = 0$ and $T = 0$, then $\mathcal{V}_z = 0$; if $s = 0$, then $\mathcal{V}_z = \mathcal{V}$. Now, combine Theorem 2.3 with Proposition 1.5.

Corollary 2.6.

$\{K \in \Gamma_0 | K \geq 0\} \neq \emptyset \Leftrightarrow \mathcal{X}_s(A) + \langle A | \text{im}(B) \rangle + \mathcal{V} = \mathbf{R}^n$.

Proof. \Rightarrow let $\phi(K) = 0, K \geq 0$. Then, by (1.8), (1.13), $J(x_0, u) \leq x_0' K x_0$ if, for all $i \geq 0$ we take $u(i) = F(K)x(i)$. Now, apply Corollary 2.5. \Leftarrow Corollary 2.5.

It should be stressed that Theorem 2.3 determines K_z *unambiguously* in terms of solutions of Γ ; if $\tilde{K} \in \Gamma$, $\tilde{K}\mathcal{V}_z = 0$ and $K \leq \tilde{K}$ if $K \in \Gamma$, $K\mathcal{V}_z = 0$, then $K_z \leq \tilde{K} \leq K_z$. In words, one can say that K_z is the *largest element* of $\{K \in \Gamma | K\mathcal{V}_z = 0\}$. Yet, $K_z \in \Gamma_0$ and K_z corresponds

to $\begin{bmatrix} 0 & 0 \\ 0 & \bar{K}_+ \end{bmatrix}$, with \bar{K}_+ the *largest* solution of the LMI that corresponds to the subsystem for

$x_2(i)$ and $x_2(i)$ in (2.3) (Proposition 1.7 (a)). If $s = 0$, then $\bar{K}_+ = \begin{bmatrix} 0 & 0 \\ 0 & K_{33} \end{bmatrix}$, and K_{33} denotes

the *unique* positive semidefinite solution of the ARE that is associated with the subsystem for $x_3(i)$ [1, Section IV].

3. Existence of optimal controls for left invertible systems.

In the final Section we assume that $\rho = m$ [1, p. 350-351]. Moreover, we assume (2.5) to be valid and hence (Corollary 1.4) $D'D + B'K_z B > 0$. For notational ease, set $A_z := A_{F(K_z)} C_z := C_{F(K_z)} S_z := S_{F(K_z)} D_1 := \{z \in \mathbb{C} | |z| \leq 1\}$, $D_1^0 := \{z \in \mathbb{C} | |z| < 1\}$.

Proposition 3.1.

$\forall x_0 \in \mathbf{R}^n \exists u : J_z(x_0) = J(x_0, u)$ and $z(i) \rightarrow 0 (i \rightarrow \infty) \Leftrightarrow \sigma(A_z | \mathbf{R}^n / \mathcal{V}_z) \subset D_1^0$.

Proof. \Rightarrow From Corollary 1.6, for every $x_0 \in \mathbf{R}^n$, $u(i) = F(K_z)x(i) (i \geq 0)$ and hence (1.1)-(1.2) transform into $x(i+1) = A_z x(i), y(i) = C_z x(i), z(i) = S_z x(i)$. From Proposition 1.7 (c), then, $F(K_z) \in \mathcal{G}_z(\Sigma)$ (take $G \in \mathcal{G}_z(\Sigma)$, and recall that $K_z \mathcal{V}_z = 0$). Thus, if

$\mathcal{V}_z \oplus \mathcal{X}_2 = \mathbf{R}^n$, then the transformed system (1.1)-(1.2) can be partitioned into $\begin{bmatrix} x_1(i+1) \\ x_2(i+1) \end{bmatrix} =$

$\begin{bmatrix} A_{11} & A_{12} \\ 0 & A_{22} \end{bmatrix} \begin{bmatrix} x_1(i) \\ x_2(i) \end{bmatrix}, y(i) = C_2 x_1(i), z(i) = S_2 x_1(i)$, and $\sigma(A_{22}) = \sigma(A_z | \mathbf{R}^n / \mathcal{V}_z)$. As

$x_2(i) \rightarrow 0 (i \rightarrow \infty)$ for every x_{02} (see proof of Theorem 2.3), it follows that $\sigma(A_{22}) \subset D_1^0$. \Leftarrow If $\sigma(A_{22}) \subset D_1^0$, then choosing $u(i) = F(K_z)x(i)$ ($i \geq 0$) yields that $x_2(i) \rightarrow 0$ for every x_{02} and thus, for every $x_0 \in \mathbb{R}^n$, $z(i) \rightarrow 0 (i \rightarrow \infty)$. Now, apply Proposition 1.5.

Proposition 3.2.

$$\sigma(A_z | \mathbb{R}^n / \mathcal{V}_z) \subset D_1.$$

Proof. Consider (2.3). Since $\rho = m$, $\ker(D) \cap B^{-1}(\mathcal{V}) = 0$ [1, p. 352], and thus the first two columns of B in (2.3) are not appearing, and $D = D_3$. Let, further, $\bar{A} = \begin{bmatrix} \bar{A}_{22} & \bar{A}_{23} \\ 0 & \bar{A}_{33} \end{bmatrix}$, $\bar{B} = \begin{bmatrix} B_{23} \\ B_{33} \end{bmatrix}$, $\bar{C} = [0, C_3]$. As (\bar{A}, \bar{B}) is stabilizable by (2.5), the largest solution \bar{K}_+ of the LMI

associated with $\bar{\Sigma} = (\bar{A}, \bar{B}, \bar{C}, D)$ exists (Corollary 2.5), and $K_z = \begin{bmatrix} 0 & 0 \\ 0 & \bar{K}_+ \end{bmatrix}$ (see end of

Section 2). Moreover, $D'D + B'K_zB = D'D + \bar{B}'\bar{K}_+\bar{B} > 0$, and it follows that $\sigma(A_z | \mathbb{R}^n / \mathcal{V}_z) = \sigma(\bar{A} - \bar{B}(D'D + \bar{B}'\bar{K}_+\bar{B})^{-1}(\bar{D}'\bar{C} + \bar{B}'\bar{K}_+\bar{A}))$. Hence we are done if the *largest* solution K_+ of Γ satisfies $\sigma(A_{F(K_+)}) \subset D_1$ if (A, B) is stabilizable and $\rho = m$ (existence of K_+ is clear by Corollary 2.5). Now, consider, besides (1.1), the system $\Sigma_n (n \geq 1)$ with, instead of $y(i), y_n(i) = [y'(i) \ (1/n)x'(i)]'$. The system matrix for Σ_n is left invertible for every $s \in \mathbb{C}$, as $\ker(B) \cap \ker(D) = 0$, and hence the *unique* positive semidefinite solution of $n^{-2}I + \phi(K) = 0$, K_n , is such that $\sigma(A_{F(K_n)}) \subset D_1^0$ [1, Section IV]. As $K_{n_1} \geq K_{n_2} \geq K_+ (n_1 \geq n_2)$, by (1.4) and Corollary 2.5,

we establish that $\bar{K} := \lim_{n \rightarrow \infty} K_n \geq K_+$, but also $\bar{K} \leq K_+$, since $P(K_n) + \begin{bmatrix} n^{-2}I & 0 \\ 0 & 0 \end{bmatrix} \geq 0$,

and thus, by continuity, $\bar{K} \in \Gamma$. Hence $K_+ = \bar{K}$ and therefore $\sigma(A_{F(K_+)}) \subset D_1$, again by continuity (note that, for all $n \geq 1$, $D'D + B'K_nB \geq D'D + B'K_+B > 0$).

Proposition 3.3.

If $G_{1,2} \in \mathcal{G}(\Sigma)$, then $\sigma(A_{G_1} | \mathcal{V}) = \sigma(A_{G_2} | \mathcal{V})$. Let $G \in \mathcal{G}_z(\Sigma) \cap \mathcal{G}(\Sigma)$. Then $\sigma(A_z | \mathbb{R}^n / \mathcal{V}_z) \cap (D_1 \setminus D_1^0) = \emptyset \Leftrightarrow \sigma(A_G | \mathcal{V} / \mathcal{V}_z) \cap (D_1 \setminus D_1^0) = \emptyset$.

Proof. First claim: [1, p. 353]. Second claim: \Rightarrow Let $(A_G - \lambda I)v \in \mathcal{V}_z, v \in \mathcal{V}, v \notin \mathcal{V}_z, |\lambda| = 1$. Then, with $K = K_z$ in Proposition 1.7 (a), we find that $B'K_zv = 0$, as $D'D + B'K_zB > 0$. Hence, by Proposition 1.7 (c), $A_zv = A_Gv$, which contradicts our assumption. \Leftarrow Let $(A_z - \lambda I)v \in \mathcal{V}_z, v \notin \mathcal{V}_z, |\lambda| = 1$. Then, by Proposition 1.7 (b) with $K = K_z, v \in \ker(C_z) | A_z > \subset \mathcal{V} (u(i) = F(K_z)x(i) \text{ yields } y(i) = 0 \text{ for all } i \geq 0 \text{ if } x_0 = v)$. Now K_- exists, by Corollary 2.5. Thus, by Proposition 1.7 (c), $A_{F(K_-)}v = A_Gv$. On the other hand, again by Proposition 1.7 (c), $A_{F(K_-)}v = A_zv - B(D'D + B'K_-B)^{-1}(D'C_z + B'K_-A_z)v = A_zv$, and we have a contradiction with our assumption.

Theorem 3.4.

Assume that (2.5) is valid and that Σ is left invertible. Then for every $x_0 \in \mathbb{R}^n$ an optimal control for (LQCP) $_z$ exists if and only if $\sigma(A_G | \mathcal{V} / \mathcal{V}_z) \cap (D_1 \setminus D_1^0) = \emptyset$, with $G \in \mathcal{G}_z(\Sigma) \cap \mathcal{G}(\Sigma)$. If this is the case, then this optimal control is *unique*, and it can be given by the *unique* feedback law $u(i) = F(K_z)x(i)$, for all $i \geq 0$.

Proof. Combine Propositions 3.1-3.3.

Remarks.

1. Observe that Theorem 2.3 links *any* (LQCP) $_z$ to *one* $K_z \in \Gamma_0$. Thus, Theorem 2.3 *maps* the set $\{(S, T) \in (\mathbb{R}^{s \times n}, \mathbb{R}^{s \times m}) | s \geq 0\}$ to $\{K \in \Gamma_0 | K \geq 0\}$ if (A, B) is stabilizable. One can show that this map is, in fact, *onto*; for every $0 \leq K \in \Gamma_0, J_z(x_0) = x_0'Kx_0$ on \mathbb{R}^n , with $z(i) = Kx(i)$ ($i \geq 0$).
2. Corollary 2.6 generalizes [7, Theorem 3.1].
3. Proposition 3.2 is *true* if $\rho \neq m$. For example, let $A = 2, B = 1, C = D = 0, S = 1, T = 0$. The ARE is $0 = 4K - K - 4K = -K; K_+ = 0$ and $A_{F(K_+)} = 2 \notin D_1$; note that $T(z) = 0$.

References.

1. L.M. Silverman, "Discrete Riccati equations: Alternative algorithms, asymptotic properties, and system theory interpretations", in **Control and Dynamic Systems** 12,

Academic, New York, pp. 313-385, 1976.

2. B.P. Molinari, "The time-invariant linear-quadratic optimal control problem", *Automatica* 13, pp. 347-357, 1977.
3. J.M. Schumacher, "The role of the dissipation matrix in singular optimal control", *Syst. Cont. Lett.* 2, pp. 262-266, 1983.
4. W.M. Wonham, **Linear Multivariable Control: A Geometric Approach**, Springer, New York, 1979.
5. M.L.J. Hautus, "Strong detectability and observers", *Lin. Alg. Appl.* 50, pp. 353-368, 1983.
6. H. Kwakernaak & R. Sivan, **Linear Optimal Control Systems**, Wiley, New York, 1972.
7. H.K. Wimmer, "Existence of positive-definite and semidefinite solutions of discrete-time algebraic Riccati equations", *Int. J. Cont.*, to be published.

IN 1992 REEDS VERSCHENEN

- 532 F.G. van den Heuvel en M.R.M. Turlings
Privatisering van arbeidsongeschiktheidsregelingen
Refereed by Prof.Dr. H. Verbon
- 533 J.C. Engwerda, L.G. van Willigenburg
LQ-control of sampled continuous-time systems
Refereed by Prof.dr. J.M. Schumacher
- 534 J.C. Engwerda, A.C.M. Ran & A.L. Rijkeboer
Necessary and sufficient conditions for the existence of a positive definite solution of the matrix equation $X + A^*X^{-1}A = Q$.
Refereed by Prof.dr. J.M. Schumacher
- 535 Jacob C. Engwerda
The indefinite LQ-problem: the finite planning horizon case
Refereed by Prof.dr. J.M. Schumacher
- 536 Gert-Jan Otten, Peter Borm, Ton Storcken, Stef Tijs
Effectivity functions and associated claim game correspondences
Refereed by Prof.dr. P.H.M. Ruys
- 537 Jack P.C. Kleijnen, Gustav A. Alink
Validation of simulation models: mine-hunting case-study
Refereed by Prof.dr.ir. C.A.T. Takkenberg
- 538 V. Feltkamp and A. van den Nouweland
Controlled Communication Networks
Refereed by Prof.dr. S.H. Tijs
- 539 A. van Schaik
Productivity, Labour Force Participation and the Solow Growth Model
Refereed by Prof.dr. Th.C.M.J. van de Klundert
- 540 J.J.G. Lemmen and S.C.W. Eijffinger
The Degree of Financial Integration in the European Community
Refereed by Prof.dr. A.B.T.M. van Schaik
- 541 J. Bell, P.K. Jagersma
Internationale Joint Ventures
Refereed by Prof.dr. H.G. Barkema
- 542 Jack P.C. Kleijnen
Verification and validation of simulation models
Refereed by Prof.dr.ir. C.A.T. Takkenberg
- 543 Gert Nieuwenhuis
Uniform Approximations of the Stationary and Palm Distributions of Marked Point Processes
Refereed by Prof.dr. B.B. van der Genugten

- 544 R. Heuts, P. Nederstigt, W. Roebroek, W. Selen
Multi-Product Cycling with Packaging in the Process Industry
Refereed by Prof.dr. F.A. van der Duyn Schouten
- 545 J.C. Engwerda
Calculation of an approximate solution of the infinite time-varying
LQ-problem
Refereed by Prof.dr. J.M. Schumacher
- 546 Raymond H.J.M. Gradus and Peter M. Kort
On time-inconsistency and pollution control: a macroeconomic approach
Refereed by Prof.dr. A.J. de Zeeuw
- 547 Drs. Dolph Cantrijn en Dr. Rezaul Kabir
De Invloed van de Invoering van Preferente Beschermingsaandelen op
Aandelenkoersen van Nederlandse Beursgenoteerde Ondernemingen
Refereed by Prof.dr. P.W. Moerland
- 548 Sylvester Eijffinger and Eric Schaling
Central bank independence: criteria and indices
Refereed by Prof.dr. J.J. Sijben
- 549 Drs. A. Schmeits
Geïntegreerde investerings- en financieringsbeslissingen; Implicaties
voor Capital Budgeting
Refereed by Prof.dr. P.W. Moerland
- 550 Peter M. Kort
Standards versus standards: the effects of different pollution
restrictions on the firm's dynamic investment policy
Refereed by Prof.dr. F.A. van der Duyn Schouten
- 551 Niels G. Noorderhaven, Bart Nooteboom and Johannes Berger
Temporal, cognitive and behavioral dimensions of transaction costs;
to an understanding of hybrid vertical inter-firm relations
Refereed by Prof.dr. S.W. Douma
- 552 Ton Storcken and Harrie de Swart
Towards an axiomatization of orderings
Refereed by Prof.dr. P.H.M. Ruys
- 553 J.H.J. Roemen
The derivation of a long term milk supply model from an optimization
model
Refereed by Prof.dr. F.A. van der Duyn Schouten
- 554 Geert J. Almekinders and Sylvester C.W. Eijffinger
Daily Bundesbank and Federal Reserve Intervention and the Conditional
Variance Tale in DM/\$-Returns
Refereed by Prof.dr. A.B.T.M. van Schaik
- 555 Dr. M. Hetebrij, Drs. B.F.L. Jonker, Prof.dr. W.H.J. de Freytas
"Tussen achterstand en voorsprong" de scholings- en personeelsvoor-
zieningsproblematiek van bedrijven in de procesindustrie
Refereed by Prof.dr. Th.M.M. Verhallen

- 556 Ton Geerts
Regularity and singularity in linear-quadratic control subject to implicit continuous-time systems
Communicated by Prof.dr. J. Schumacher
- 557 Ton Geerts
Invariant subspaces and invertibility properties for singular systems: the general case
Communicated by Prof.dr. J. Schumacher
- 558 Ton Geerts
Solvability conditions, consistency and weak consistency for linear differential-algebraic equations and time-invariant singular systems: the general case
Communicated by Prof.dr. J. Schumacher
- 559 C. Fricker and M.R. Jaïbi
Monotonicity and stability of periodic polling models
Communicated by Prof.dr.ir. O.J. Boxma
- 560 Ton Geerts
Free end-point linear-quadratic control subject to implicit continuous-time systems: necessary and sufficient conditions for solvability
Communicated by Prof.dr. J. Schumacher
- 561 Paul G.H. Mulder and Anton L. Hempenius
Expected Utility of Life Time in the Presence of a Chronic Noncommunicable Disease State
Communicated by Prof.dr. B.B. van der Genugten
- 562 Jan van der Leeuw
The covariance matrix of ARMA-errors in closed form
Communicated by Dr. H.H. Tigelaar
- 563 J.P.C. Blanc and R.D. van der Mei
Optimization of polling systems with Bernoulli schedules
Communicated by Prof.dr.ir. O.J. Boxma
- 564 B.B. van der Genugten
Density of the least squares estimator in the multivariate linear model with arbitrarily normal variables
Communicated by Prof.dr. M.H.C. Paardekooper
- 565 René van den Brink, Robert P. Gilles
Measuring Domination in Directed Graphs
Communicated by Prof.dr. P.H.M. Ruys
- 566 Harry G. Barkema
The significance of work incentives from bonuses: some new evidence
Communicated by Dr. Th.E. Nijman

- 567 Rob de Groof and Martin van Tuijl
Commercial integration and fiscal policy in interdependent, financially integrated two-sector economies with real and nominal wage rigidity.
Communicated by Prof.dr. A.L. Bovenberg
- 568 F.A. van der Duyn Schouten, M.J.G. van Eijs, R.M.J. Heuts
The value of information in a fixed order quantity inventory system
Communicated by Prof.dr. A.J.J. Talman
- 569 E.N. Kertzman
Begrotingsnormering en EMU
Communicated by Prof.dr. J.W. van der Dussen
- 570 A. van den Elzen, D. Talman
Finding a Nash-equilibrium in noncooperative N-person games by solving a sequence of linear stationary point problems
Communicated by Prof.dr. S.H. Tijs
- 571 Jack P.C. Kleijnen
Verification and validation of models
Communicated by Prof.dr. F.A. van der Duyn Schouten
- 572 Jack P.C. Kleijnen and Willem van Groenendaal
Two-stage versus sequential sample-size determination in regression analysis of simulation experiments
- 573 Pieter K. Jagersma
Het management van multinationale ondernemingen: de concernstructuur
- 574 A.L. Hempenius
Explaining Changes in External Funds. Part One: Theory
Communicated by Prof.Dr.Ir. A. Kapteyn
- 575 J.P.C. Blanc, R.D. van der Mei
Optimization of Polling Systems by Means of Gradient Methods and the Power-Series Algorithm
Communicated by Prof.dr.ir. O.J. Boxma
- 576 Herbert Hamers
A silent duel over a cake
Communicated by Prof.dr. S.H. Tijs
- 577 Gerard van der Laan, Dolf Talman, Hans Kremers
On the existence and computation of an equilibrium in an economy with constant returns to scale production
Communicated by Prof.dr. P.H.M. Ruys
- 578 R.Th.A. Wagemakers, J.J.A. Moors, M.J.B.T. Janssens
Characterizing distributions by quantile measures
Communicated by Dr. R.M.J. Heuts

- 579 J. Ashayeri, W.H.L. van Esch, R.M.J. Heuts
Amendment of Heuts-Selen's Lotsizing and Sequencing Heuristic for
Single Stage Process Manufacturing Systems
Communicated by Prof.dr. F.A. van der Duyn Schouten
- 580 H.G. Barkema
The Impact of Top Management Compensation Structure on Strategy
Communicated by Prof.dr. S.W. Douma
- 581 Jos Benders en Freek Aertsen
Aan de lijn of aan het lijntje: wordt slank produceren de mode?
Communicated by Prof.dr. S.W. Douma
- 582 Willem Haemers
Distance Regularity and the Spectrum of Graphs
Communicated by Prof.dr. M.H.C. Paardekooper
- 583 Jalal Ashayeri, Behnam Pourbabai, Luk van Wassenhove
Strategic Marketing, Production, and Distribution Planning of an
Integrated Manufacturing System
Communicated by Prof.dr. F.A. van der Duyn Schouten
- 584 J. Ashayeri, F.H.P. Driessen
Integration of Demand Management and Production Planning in a
Batch Process Manufacturing System: Case Study
Communicated by Prof.dr. F.A. van der Duyn Schouten
- 585 J. Ashayeri, A.G.M. van Eijs, P. Nederstigt
Blending Modelling in a Process Manufacturing System
Communicated by Prof.dr. F.A. van der Duyn Schouten
- 586 J. Ashayeri, A.J. Westerhof, P.H.E.L. van Alst
Application of Mixed Integer Programming to
A Large Scale Logistics Problem
Communicated by Prof.dr. F.A. van der Duyn Schouten
- 587 P. Jean-Jacques Herings
On the Structure of Constrained Equilibria
Communicated by Prof.dr. A.J.J. Talman

IN 1993 REEDS VERSCHENEN

- 588 Rob de Groof and Martin van Tuijl
The Twin-Debt Problem in an Interdependent World
Communicated by Prof.dr. Th. van de Klundert
- 589 Harry H. Tigelaar
A useful fourth moment matrix of a random vector
Communicated by Prof.dr. B.B. van der Genugten
- 590 Niels G. Noorderhaven
Trust and transactions; transaction cost analysis with a differential behavioral assumption
Communicated by Prof.dr. S.W. Douma
- 591 Henk Roest and Kitty Koelemeijer
Framing perceived service quality and related constructs
A multilevel approach
Communicated by Prof.dr. Th.M.M. Verhallen
- 592 Jacob C. Engwerda
The Square Indefinite LQ-Problem: Existence of a Unique Solution
Communicated by Prof.dr. J. Schumacher
- 593 Jacob C. Engwerda
Output Deadbeat Control of Discrete-Time Multivariable Systems
Communicated by Prof.dr. J. Schumacher
- 594 Chris Veld and Adri Verboven
An Empirical Analysis of Warrant Prices versus Long Term Call Option Prices
Communicated by Prof.dr. P.W. Moerland
- 595 A.A. Jeunink en M.R. Kabir
De relatie tussen aandelhoudersstructuur en beschermingsconstructies
Communicated by Prof.dr. P.W. Moerland
- 596 M.J. Coster and W.H. Haemers
Quasi-symmetric designs related to the triangular graph
Communicated by Prof.dr. M.H.C. Paardekooper
- 597 Noud Gruijters
De liberalisering van het internationale kapitaalverkeer in historisch-institutioneel perspectief
Communicated by Dr. H.G. van Gemert
- 598 John Görtzen en Remco Zwetheul
Weekend-effect en dag-van-de-week-effect op de Amsterdamse effectenbeurs?
Communicated by Prof.dr. P.W. Moerland
- 599 Philip Hans Franses and H. Peter Boswijk
Temporal aggregation in a periodically integrated autoregressive process
Communicated by Prof.dr. Th.E. Nijman

- 600 René Peeters
On the p-ranks of Latin Square Graphs
Communicated by Prof.dr. M.H.C. Paardekooper
- 601 Peter E.M. Borm, Ricardo Cao, Ignacio García-Jurado
Maximum Likelihood Equilibria of Random Games
Communicated by Prof.dr. B.B. van der Genugten
- 602 Prof.dr. Robert Bannink
Size and timing of profits for insurance companies. Cost assignment
for products with multiple deliveries.
Communicated by Prof.dr. W. van Hulst
- 603 M.J. Coster
An Algorithm on Addition Chains with Restricted Memory
Communicated by Prof.dr. M.H.C. Paardekooper
- 604 Ton Geerts
Coordinate-free interpretations of the optimal costs for LQ-problems
subject to implicit systems
Communicated by Prof.dr. J.M. Schumacher
- 605 B.B. van der Genugten
Beat the Dealer in Holland Casino's Black Jack
Communicated by Dr. P.E.M. Borm
- 606 Gert Nieuwenhuis
Uniform Limit Theorems for Marked Point Processes
Communicated by Dr. M.R. Jaïbi
- 607 Dr. G.P.L. van Roij
Effectisering op internationale financiële markten en enkele gevolgen
voor banken
Communicated by Prof.dr. J. Sijben
- 608 R.A.M.G. Joosten, A.J.J. Talman
A simplicial variable dimension restart algorithm to find economic
equilibria on the unit simplex using $n(n+1)$ rays
Communicated by Prof.Dr. P.H.M. Ruys
- 609 Dr. A.J.W. van de Gevel
The Elimination of Technical Barriers to Trade in the European
Community
Communicated by Prof.dr. H. Huizinga
- 610 Dr. A.J.W. van de Gevel
Effective Protection: a Survey
Communicated by Prof.dr. H. Huizinga
- 611 Jan van der Leeuw
First order conditions for the maximum likelihood estimation of an
exact ARMA model
Communicated by Prof.dr. B.B. van der Genugten

- 612 Tom P. Faith
Bertrand-Edgeworth Competition with Sequential Capacity Choice
Communicated by Prof.Dr. S.W. Douma

Bibliotheek K. U. Brabant



17 000 01133531 3